




Part Number: **148015**

Description: **FENCE ASSEMBLY,CHAIN LINK,YODOCK**

**Specification:**

A fence panel to supplement the Yodock 2001 series barriers. (All material and hardware to be galvanized per manufacturing specifications)  
Fabric to be 11.5 GA 1V, laced or tied at each eyelet on top, bottom and sides of frame, with 4 ties on center support, spaced equally.  
Fabric to fill framework; 68.75" x 60.375".

- Additional items to be included:
- 2 - Saddle Clamps PS 14ga 1-3/8in.
  - 2 - Dome Cap PS

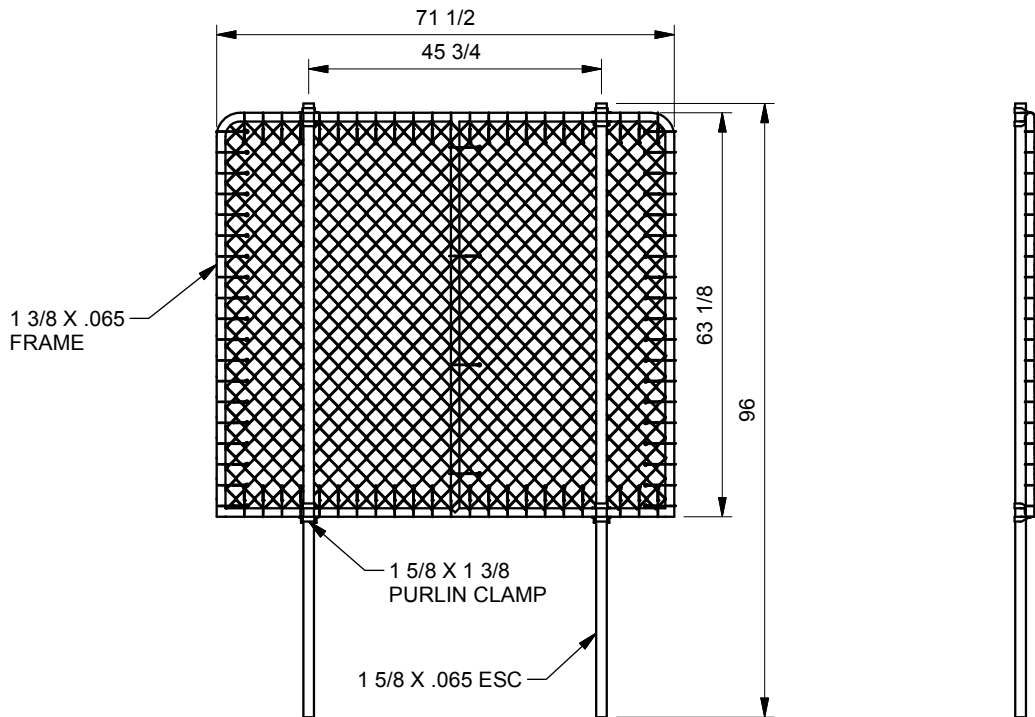

Apply:     Does Not Apply:

ALL STEEL AND/OR IRON MUST BE MELTED AND MANUFACTURED IN THE USA, IN COMPLIANCE WITH THE FEDERAL HIGHWAY ADMINISTRATION BUY AMERICA REQUIREMENTS. ORIGINAL RAW MATERIAL PRODUCING MILL TEST REPORTS ARE REQUIRED. ALL MATERIAL MUST HAVE FULL TRACEABILITY BY HEAT NUMBER FROM ALL SOURCES, INCLUDING 3RD PARTY PROCESSORS AND GALVANIZERS. ALL RECEIPTS MUST BE IDENTIFIED BY QUANTITY, EITHER IN POUNDS OR PIECES, BY HEAT NUMBER.

Approved Manufacturer(s):     Vendor Reference:  
Stephens Pipe & Steel

Prepared: D. Kohfeld	10/29/2013
Engineer: A. Van Brocklin	10/30/2013
Purchasing: J. Coss	10/31/2013

**Revision Description**

Revision Description	ECO	Rev	By	Date	Eng	Pur
Moved Stephens Pipe & Steel from Approved Manufacturer to Vendor Reference, checked the "Does Not Apply" Box above.	5384	B	DDS	5/21/18	CGB	JLC
Updated image to incorporate new size of panel, (was 60x72), updated body of spec to include fabric and tie specifications	5429	C	DDS	7/10/18	CGB	JLC
UPDATED SPEC FORM, ADDED GALVANIZING NOTE TO SPECIFICATON, ADDED "ADDITIONAL ITEMS TO BE INCLUDED: ....."	6065	D	RJV	9/4/18	ARVB	JLC