

SUPAGRIP® CURB RAMP

Durable, anti-slip ramp designed for safe pedestrian and wheelchair access across curbs during temporary or semi-permanent projects. Lightweight, high-grip surface with replaceable parts extends service life in field conditions.

Type: Plastic Curb Ramp

Brand: Oxford Plastics

Model Number: WRAMP30504



TECHNICAL SPECIFICATIONS

Material	High-Density Plastic (Fully Recyclable)
Dimensions (L x W x H)	50.4" x 29.9" x 4.3"
Weight	22 lbs
Kerb Height Range	2.4"-6.3"
Maximum Load Capacity	770 lbs
Deflection at Load (350 kg)	0.5"
Deflection at Load (1150 kg)	0.8"
Surface	Integral Slip-Resistant Texture
Fixing Method	Freestanding or Optional Bolt-Down (½" masonry anchors)
Operating Temperature Range	-20°F to 120°F
Color	Yellow with Black Edges
Compliance	HAUC 2018/01 (Red Book), ADA Equivalent Guidelines

WHY CHOOSE THIS MODEL?



Proven performance under pedestrian and wheelchair loads up to 770 lbs.



Fully recyclable and compliant with international pedestrian access standards.



Integral anti-slip surface with replaceable edge and clip components.



Available through SONCO with nationwide stock and distribution support.

USER OPERATION



One-person lift for quick setup and removal.




Can be used without bolts on stable surfaces.



Optional bolt-down fixing for high-traffic or sloped areas.



Suitable for pedestrians, wheelchair users, and mobility scooters.

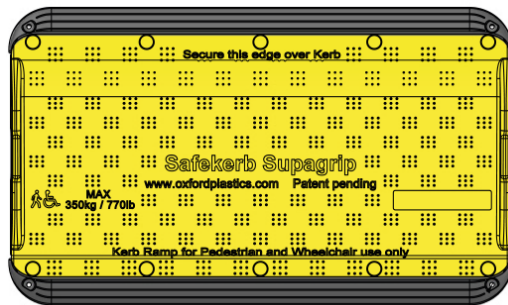


MAINTENANCE TIPS

- Inspect before each use for cracks or bending.
- Clean surfaces between installations to maintain slip resistance.
- Replace clips or black edge sections when worn.
- Avoid dropping or using machinery to lift.

Contact SONCO for product availability, bulk orders, or compatibility details.



BUILD YOUR FULL SETUP



Trench Covers

In-stock composite panels in 36" x 24" and 48" x 32" sizes for pedestrian access.



Traffic Cones & Delineators

Reflective and weighted-base versions sold in kits or bulk quantities.



Safety Signs

MUTCD-compliant and custom designs available for site applications.



Speed Bumps & Parking Stops

Rubber and concrete models in 4' and 6' lengths, stocked for quick installation.